

**FL-06-G6**

# Marine Sea Flood Light

50W/80W/100W/150W/200W

**IP66**  
**IK08**





# Marine Sea Flood Light

50W/80W/100W/150W/200W

Special For Marine Applications




**SUS316**





# Marine Sea Flood Light

50W/80W/100W/150W/200W

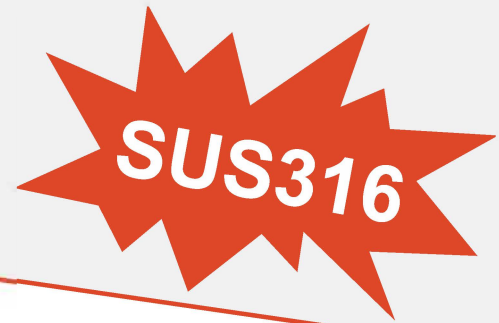


50W/80W/100W




150W/200W


## Photometry

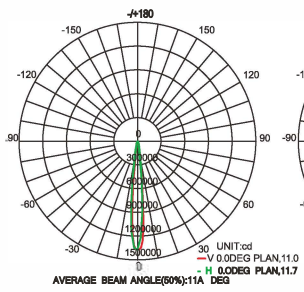


10°

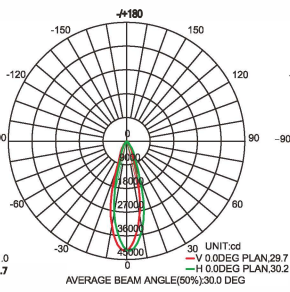


30°

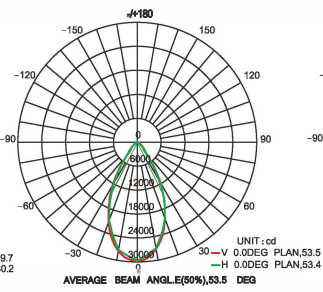


60°

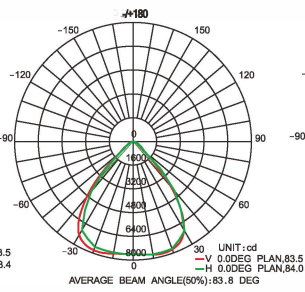


90°

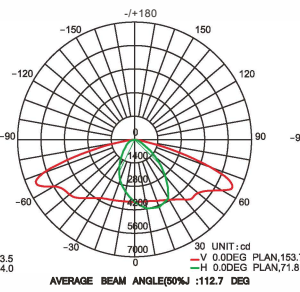

154\*83° (Type 11)

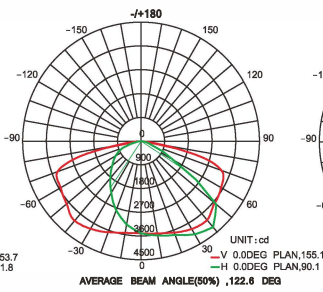

150\*80° (Type 111)

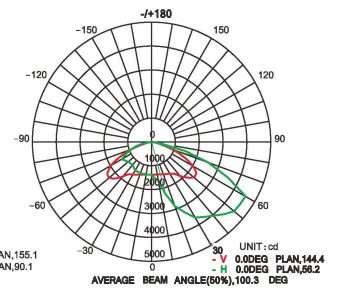

97\*47° (Type IV)




# Marine Sea Flood Light

Stronger corrosion resistance

SUS316

## Material


- ▶ SUS316 Heatsink Housing;
- ▶ The bracket, screws and buckles are all **SUS316**;
- ▶ 4mm Tempered Glass, real IK08 level;
- ▶ Stronger corrosion resistance. The anti-corrosion grade is C5.
- ▶ Withstand any harsh environment.

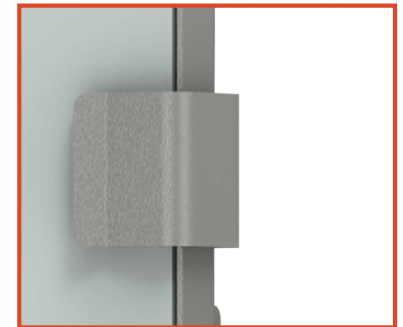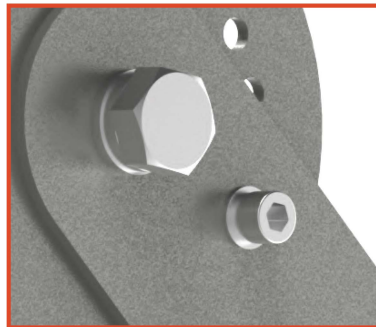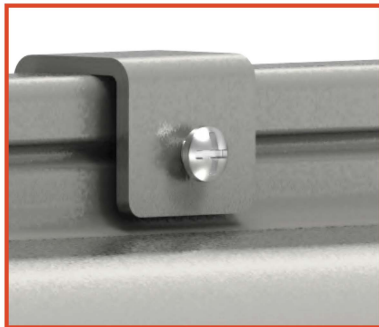



# Marine Sea Flood Light

Stronger corrosion resistance

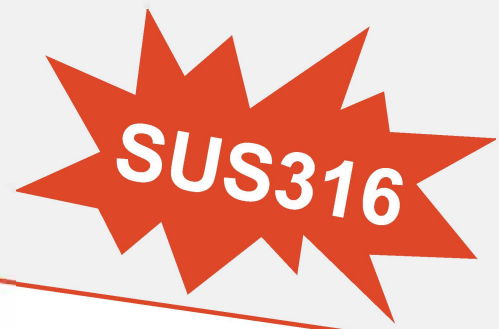


Tooling Thickness  
Waterproof Rubber

High Brightness LED

High transmittance  
PC lens

Tempered glass---

**SUS316**  
U-shaped clips

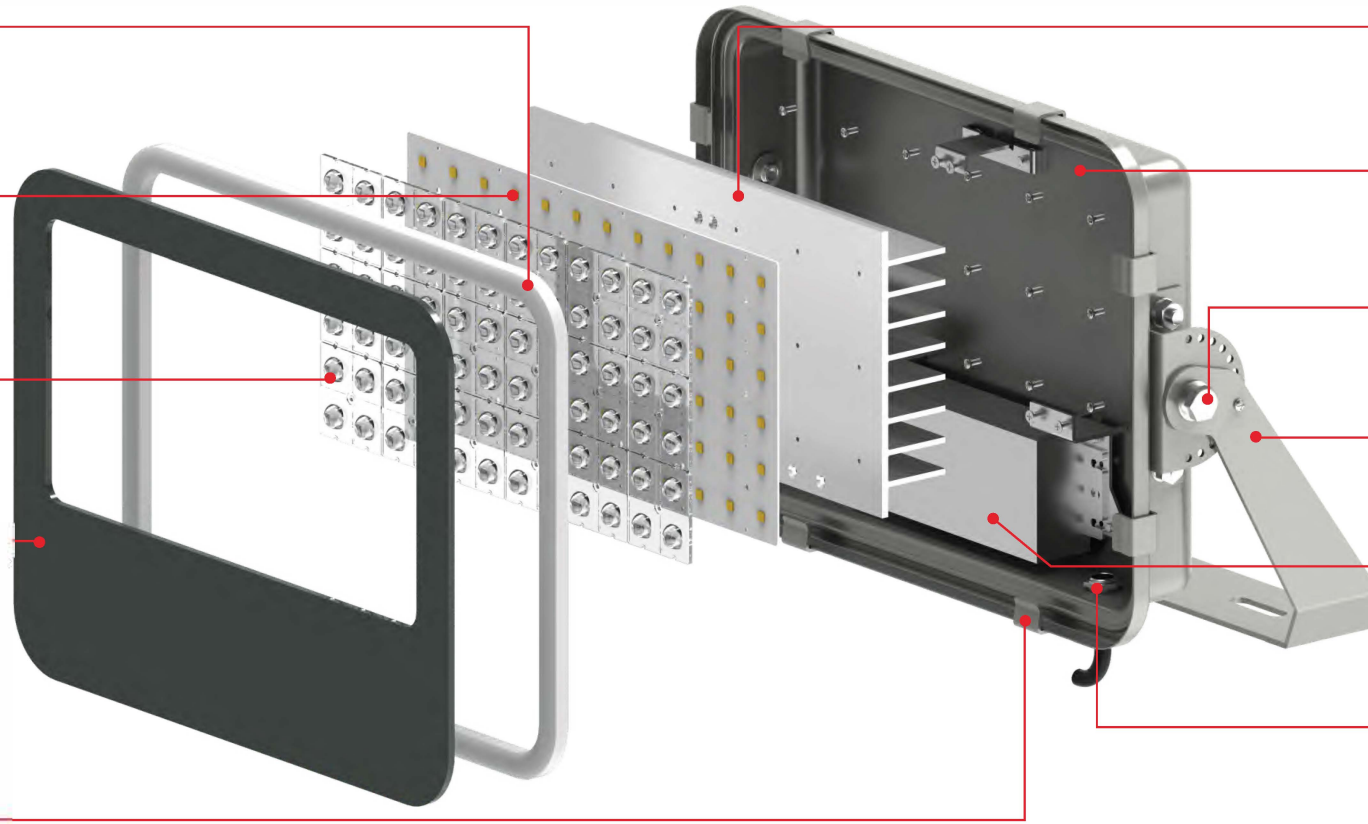

Cooling heatsink

**SUS316 Housing**

**SUS316 Screw**

**SUS316 Bracket**

Waterproof driver

1P66 waterproof  
connector

# Marine Sea Flood Light

10°/30°/60°/90°/154°\*83°/150\*80°/97\*47°

SUS316


## Accurate calibration

- ▶ 180° Rotatable, allowing to adjust the light angle freely to meet your needs.
- ▶ Accurate Beam angle marking, make installation conveniently.



## High Brightness LED

- ▶ SAMSUN3535 :150-174Lm/LED;
- ▶ SMD5050:600-650Lm/LED;
- ▶ High efficiency and Energy saving Led;
- ▶ High efficacy and lumens in a multi-die, high power package, enabling low system casts.

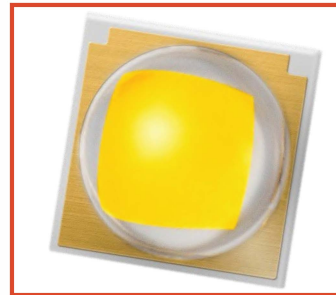

## High Brightness LED

- ▶ IK10 ANTI-UV PC LENS,  
> 95% LIGHT TRANSMISSION;
- ▶ 10°/30°/60°/90°/154°\*83°/150\*80°/97\*47° ' meet the multiple needs;





# Marine Sea Flood Light

10°/30°/60°/90°/154°\*83°/150\*80°/97\*47°

SUS316

## IP66 waterproof

- ▶ LED floodlight with IP66 waterproof connector;
- ▶ Quality Waterproof Rubber;
- ▶ whether it is rain sleet or snow, durable enough to withstand any harsh environment.

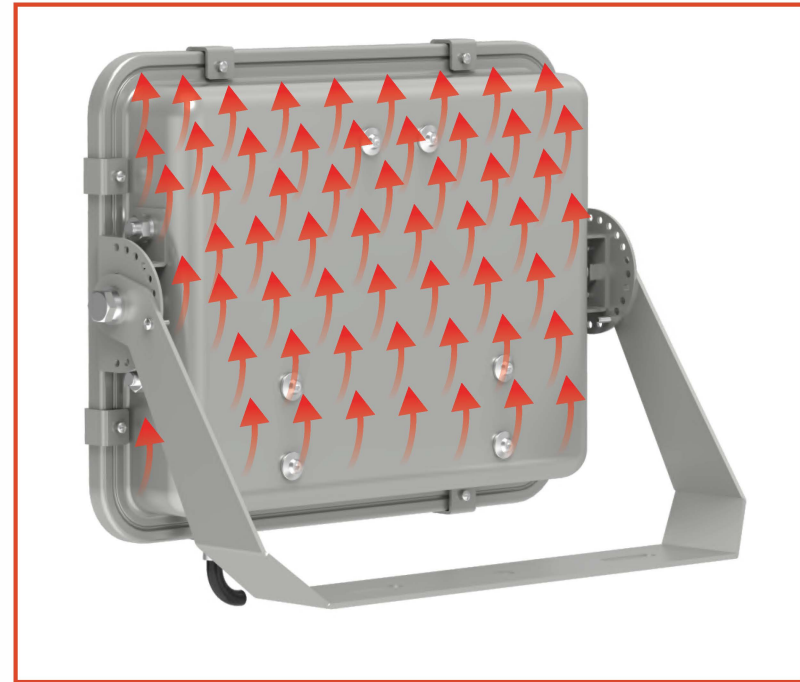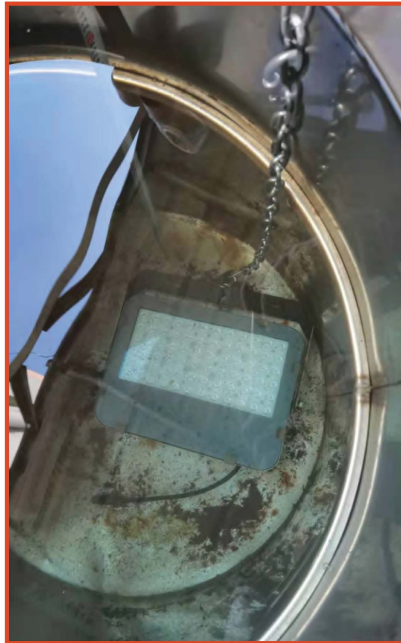

## Perfect Heatsink

- ▶ SUS316 Heatsink Housing With Nicely 3D Heat Dissipation;
- ▶ Simple, High-end Patent Design.

# Marine Sea Flood Light

10° / 30° / 60° / 90° / 154° \* 83° / 150° \* 80° / 97° \* 47°

## Application

Sea Port, Baat, Vessel, Swimming pool, Railway, Park, Square, Factory, Garden tunnel light, Sports field, Parking lot, Residential area, Landscape, Architectural decorative lighting, Roads and other places.

